


# Tideway

## PNEUMATIC DIAPHRAGM PUMP

( GMB-50 2" )



Aluminum

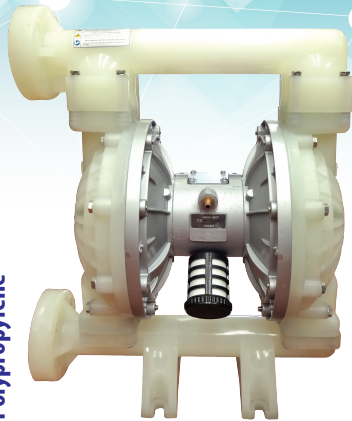


Polypropylene




Stainless Steel

### Air Consumption (m<sup>3</sup>/h)

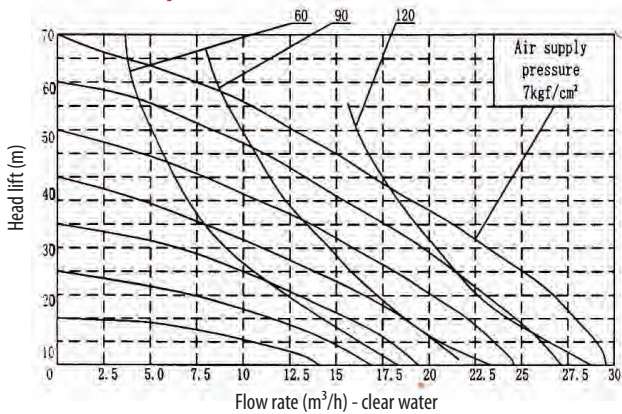

### Installation Dimension

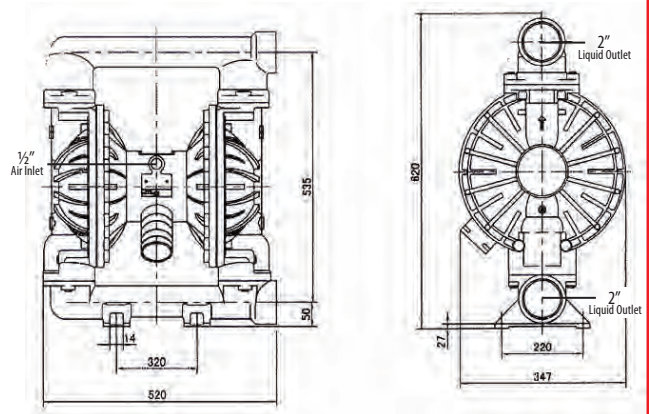

### Technical Parameters

Max. Flow Rate	0 - 30 m <sup>3</sup> /h	
Max. Lift head	0 - 70 m	
Outlet pressure	0 - 7 kgf/cm <sup>2</sup>	
Suction lift	0 - 5 m	
Allowable diameter of grains passing	0 - 8 mm	
Air supply pressure	0 - 7 kgf/cm <sup>2</sup>	
Air consumption	0 - 900 L/min	
Inlet	½ inch	
Outlet	¾ inch	
Net weight	Polypropylene - 24 kg	
	Aluminum - 24 kg	
	Stainless Steel - 39 kg	
Gross weight	Carton packaging, plus : 5 kg	Wooden Crate packaging, plus : 18 kg
	881218012A - GMB2S-50TFF	881218024A - GMB2A-50TFF

\*\*\* Product's specification subject to change without further notice.  
 \*\*\* Actual product may slightly differ from pictures shown.

ESM411 - GMB50  
 (27/07/19)