


Tideway®

STAINLESS STEEL (Auto) SUBMERSIBLE PUMP

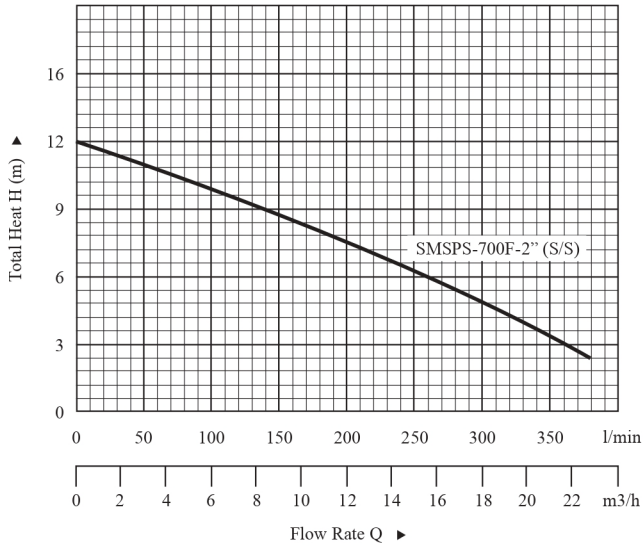

Application conditions:

- The depth for the electrical pump below the water is not more than 5m;
- The temperature of the water is no higher of 40°C;
- The PH figure of the water is between 6.5-8.5;
- The grain diameter of the solids in the water is not bigger than 0.2mm

SPECIFICATION

Model	Power (kW)	Outlet Diameter(mm)	Volt/Freq (V/Hz)	Max. flow (l/min)	Max. head (m)	Weight (kg)	Package size (cm)
SMSPS-700F-2'' (S/S)	0.7	40/50	220/50	380	12	18.5	24.5x24.5x47.0

Stock Code : 880218037- BF - SMSPS-700F-2'' (S/S)

FEATURE

- BF-SMSPS700F-2'' (S/S) stainless steel casing submersible pump is vastly used for the drainage of such place as gardening field, mine enterprises, construction site, breed aquatics industry, farming and family.
- The pump boasts the abilities of complete drainage and convenient use.
- The housing, sieve and rotor shaft are made of stainless steel and the body of the pump is chrome plated by cast iron, both of them provide the product a nice appearance and high resistance to abrasion and corrosion. (It looks like a complete stainless steel submersible pump, but sold at the price of only 50% of that of the Stainless Steel Pump).
- The float switch can automatically control on and off with the change of the liquip lever.
- The protector in the motor can automatically cut off the power when it over heated or over currented, thus guarantee the security and reliability of pump's operation even in the atrocious environment.

*** Product's specification may subject to change without futher notice.
 *** Actual product may slightly differ from pictures shown.

ESM415
(05/04/13)