

Vitoli® Axial Blower

RPZ500-150-6


(881102030)



CHARACTERISTICS

1. High temperature resistant: RPZ series can work continuously for about 30 minutes at a medium temperature of 280°.
2. Constructed of whole turned flange and integrally formed wheel hub, which results in durable and beautiful shape.
3. Widely used in the local architecture, there are two drive style: single speed and twin speed, currently used for ventilation but for smoke exhausting when it is to fire fighting.

*** Used in the high building, parking garage, oven, tunnel where need ventilation and fire exhausting.

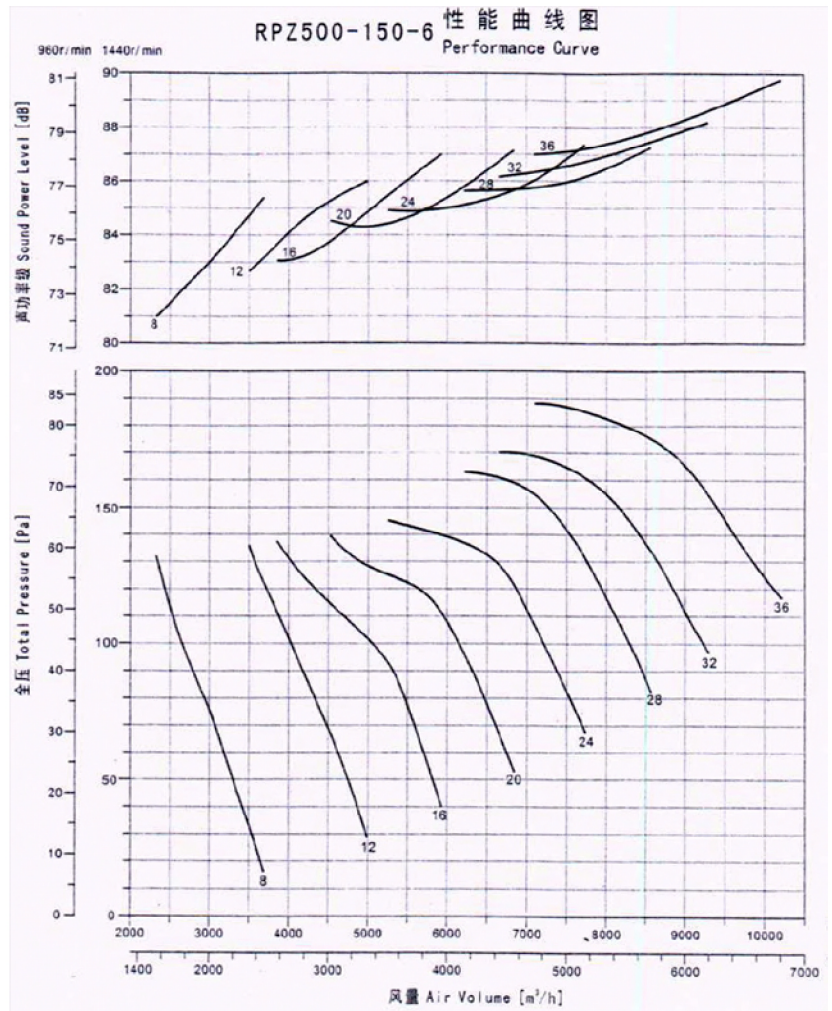

Blade Angle (°)	Speed (rpm)	Pressure (Pa)	Air Delivery (m ³ /h)	Power (kW)
36	1440	188	7100	1.1
		172	8100	
		165	9000	
		128	9900	
Voltage : 415V				
Frequency : 50Hz				
Noise : ≤ 82.8dB(A)				
Net weight : 42kg				
Gross weight : 57kg				
Wooden Size : (690 x 670 x 555)mm				

Speed (rpm)		1440
Octave b. midfr. (Hz)	63	-36
	125	-18
	25	-10
	500	-3
	1k	-5
	2k	-7
	4k	-12
8k	-22	